

LUMERA DESIGN




LUMERA



LUMERA




Cleaning
& Care



Explanation
of symbols

The characteristic feature of our **LUMERA quality** line is the **smooth surface** created by combining staple fiber in the warp and brilliant acrylic yarn CBA (Clean Brilliant Acrylic) in the weft. The use of these fibers results in a **smoother and denser** fabric structure. Colors shine even more and the fabric's self-cleaning effect improves ensuring its durability.

2/3
ACRYLIC STAPLE FIBER

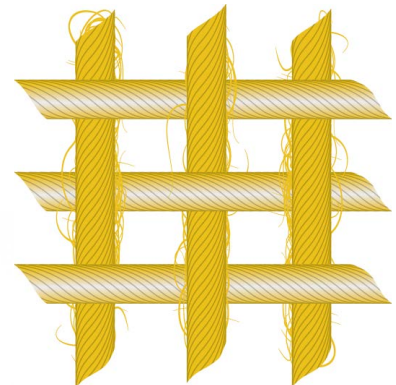

1/3
CBA



LUMERA

ALL WEATHER




All advantages offered by **LUMERA** are combined in **LUMERA ALL WEATHER** with an even more functional protection for almost all weather conditions from sun to rain. A wafer-thin finish with the intelligent **IPC** coating makes the fabric **waterproof** and yet maintains the suppleness of the fabric.

Keep an eye out for this symbol:



1/3
ACRYLIC STAPLE FIBER

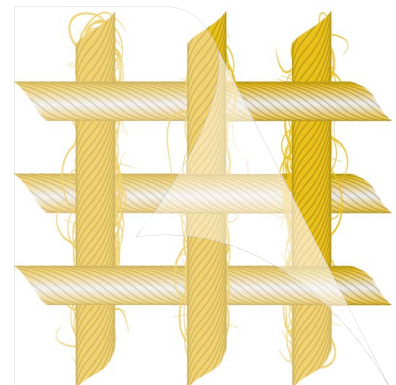

2/3
CBA





LUMERA Design



338 662
Beach



338 671
Terrain



338 639
Sahara




338 642
Greenland



338 674
Valley



338 641
Arctic



338 655
Ladakh




338 621
Gravel



338 644
Fjord



338 772
Juniper



385 901
Ebony



385 910
Basalt



338 665
Volcano



338 623
Lava

LUMERA Solids



386 055
Gneiss



386 773
Poplar



386 770
Willow



338 154
Onyx




338 398
Slate



338 058
Magnetite




338 810
Apatite



338 028
Antinolite



338 136
Hermitite



338 712
Barite



338 813
Galenite



338 078
Muscovite



338 808
Beryl



p 1300 854 811
f 1300 658 889
fabrics@hvg.net.au
hvgfabrics.com.au

© 2023 Sattler SUN-TEX | HVG Brochure Lumera_2023 AUS_1.0

FACTS

Applications



* For quality 338 only

Quality	338 LUMERA	386 LUMERA ALL WEATHER	385 LUMERA 3D	Quality	338 LUMERA	386 LUMERA ALL WEATHER	385 LUMERA 3D
DIN 60 001		100 % PAN/CBA		DIN EN ISO 13934-1	160 daN/5 cm	150 daN/5 cm	140 daN/5 cm
DIN EN 12127	290 g/m ²	340 g/m ²	295 g/m ²	DIN EN ISO 13934-1	110 daN/5 cm	100 daN/5 cm	135 daN/5 cm
EN ISO 4920		Note: 100		DIN EN ISO 105-B04		● min. 7/8** ● min. 4-5/5**	
DIN EN ISO 811	460 mm	>1000 mm	500 mm	DIN EN ISO 105-B02		● min. 7/8**	
DIN ISO 9354		L 1/1					

** white on request